

# Technical Information

## CK8167/ 4CX300A

### CERAMIC TETRODE RF POWER AMPLIFIER OR OSCILLATOR

The Raytheon CK8167/4CX300A is a power tetrode of metal-ceramic construction, designed with an external anode and integral cooling fins. In combination with the unique basing, this provides useful operation up to 500 megacycles in typical oscillator, linear amplifier and class C power amplifier service.

Compact mechanical design and forced air-cooling assure dependable performance under severe environmental conditions of temperature, vibration and shock as well as long standby periods.

CK8167/4CX300A is manufactured and controlled to meet the requirements of the applicable MIL-E-1 specification.

#### ENVIRONMENTAL RATINGS (ABSOLUTE MAXIMUM):

Temperature (seal) . . . . .	250 °C
Temperature (anode core) . . . . .	250 °C
Altitude . . . . .	10000 ft.

#### ELECTRICAL DATA

##### HEATER CHARACTERISTICS:

Heater voltage — See application note 1 . . . . .	6.0 Volts
Heater current . . . . .	2.85 Amps

##### DIRECT INTERELECTRODE CAPACITANCES:

Input . . . . .	29.0 pf
Output . . . . .	4.0 pf
Grid to plate (max.) . . . . .	0.06 pf
C k to g1 (p, g2, and h grounded) . . . . .	16.0 pf
C p to (g1 + h + g2) (k grounded) . . . . .	4.0 pf
C k to p . . . . .	0.01 pf


##### RATINGS — ABSOLUTE MAXIMUM (CCS):

	Class:	C telegraphy	C telephony	AB1
Heater voltage, See note 1 . . . . .	6.0 ± 5%	6.0 ± 5%	6.0 ± 5%	Vac
Plate voltage . . . . .	2000	1500	2500	Vdc
Screen voltage . . . . .	300	300	400	Vdc
Grid #1 voltage . . . . .	-250	-250	-250	Vdc
Plate current . . . . .	250	200	250	mAdc
Plate dissipation, See note 2 . . . . .	300	200	300	W
Screen dissipation . . . . .	12	12	12	W
Grid #1 dissipation . . . . .	2	2	2	W
Plate input power . . . . .	500	300	625	W
Heater-cathode voltage				
Heater negative to cathode . . . . .	150	150	150	Vdc
Heater positive to cathode . . . . .	150	150	150	Vdc

#### MECHANICAL DATA

BASE . . . . . Special, see below  
 OUTLINE . . . . . See below  
 RECOMMENDED . . . . . Eimac SK-700 series or equivalent  
 SOCKET . . . . .  
 OPERATING POSITION . . . . . Any  
 COOLING . . . . . Forced air  
 CATHODE . . . . . Coated, unipotential

#### OUTLINE AND BASING

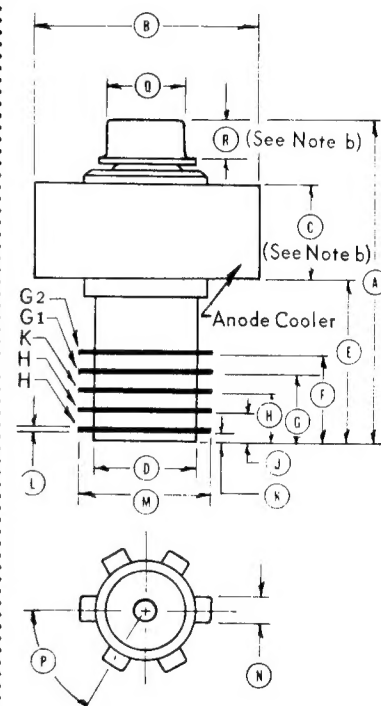

NOTES : a. All dimensions in inches unless otherwise specified.

b. Available anode contact surface.

#### PHYSICAL DIMENSIONS

	MIN.	MAX.
A	2.300	2.500
B	1.610 dia	1.640 dia
C	0.710	0.790
D	0.740 dia	0.770 dia
E	1.133	1.195
F	0.602	0.642
G	0.470	0.500
H	0.329	0.359
J	0.193	0.213
K	0.050	0.072
L	0.010	0.020
M	0.936 dia	0.956 dia
N	0.170	0.185
P	60° nom.	
Q	0.559 dia	0.573 dia
R	0.240	0.280

# CK8167/ 4CX300A

## CERAMIC TETRODE RF POWER AMPLIFIER OR OSCILLATOR

### ELECTRICAL DATA (Cont'd.)

#### GENERAL RATINGS:

Maximum frequency for full input power — See application note 1 . . . . .	500 Mc
Cathode conditioning time (tk)	
Nominal . . . . .	60 sec
Absolute minimum . . . . .	30 sec
Amplification factor (G1 to G2) . . . . .	4.8
Transconductance at Ib = 200 mAdc . . . . .	12000 $\mu$ mho

#### TYPICAL OPERATIONS:

##### RADIO-FREQUENCY POWER AMPLIFIER OR OSCILLATOR — CLASS C

See Note 7

Plate voltage . . . . .	500	1000	1500	2000	2000	Vdc
Screen grid voltage, see note 3 . . . . .	250	250	250	250	250	Vdc
Grid voltage . . . . .	-90	-90	-90	-90	-90	Vdc
Plate current . . . . .	250	250	250	250	250	mAdc
Screen grid current (approx.) . . . . .	45	38	21	19	10	mAdc
Grid #1 current (approx.) . . . . .	35	31	28	26	25	mAdc
Peak RF grid voltage (approx.) . . . . .	114	114	112	112	---	v
Driving power (approx.), see note 5 . . . . .	4.0	3.5	3.2	2.9	---	W
Plate Input Power . . . . .	125	250	375	500	500	W
Useful power output (approx.), see note 6 . . . . .	67	180	265	370	225	W
Heater voltage (note 1) . . . . .	6.0	6.0	6.0	6.0	5.5	Vac

##### AUDIO FREQUENCY AMPLIFIER OR MODULATOR, CLASS AB1 (TWO TUBES IN PUSH-PULL)

Plate voltage . . . . .	1000	1500	2000	2500	Vdc
Screen voltage, see note 3 . . . . .	350	350	350	350	Vdc
Grid voltage, see note 4 . . . . .	-55	-55	-55	-55	Vdc
Zero signal plate current . . . . .	200	200	200	200	mAdc
Max. signal plate current . . . . .	500	500	500	500	mAdc
Max. signal screen grid current . . . . .	20	16	10	8	mAdc
Effective load resistance . . . . .	3500	6200	9500	11600	ohms
Peak AF G1 to G1 voltage (approx.) . . . . .	100	100	100	100	v
Driving power . . . . .	0	0	0	0	W
Max. signal power output . . . . .	240	430	600	800	W

##### RADIO FREQUENCY LINEAR AMPLIFIER, SINGLE SIDE BAND

##### SUPPRESSED-CARRIER OPERATION (SINGLE TUBE), FREQ. UP TO APPROX. 175 Mc/s CLASS AB1

##### SINGLE TONE AND/OR TWO TONE OPERATION

Plate voltage, note 8 . . . . .	1000	1500	2000	2500	Vdc
Screen grid voltage, see notes 3 and 8 . . . . .	350	350	350	350	Vdc
Grid voltage, see note 4 . . . . .	-55	-55	-55	-55	Vdc
Zero signal plate current . . . . .	100	100	100	100	mAdc

# CK8167/ 4CX300A

## CERAMIC TETRODE RF POWER AMPLIFIER OR OSCILLATOR

### ELECTRICAL DATA (Cont'd.)

#### RADIO FREQUENCY LINEAR AMPLIFIER, SINGLE SIDE BAND (Cont'd.)

##### SINGLE TONE MODULATION

Max. signal plate current . . . . .	250	250	250	250	mAdc
Max. signal screen grid current . . . . .	10	8	5	4	mAdc
Max. sig. peak RF grid voltage (approx.) . . . . .	50	50	50	50	v
Max. signal grid current . . . . .	0	0	0	0	mAdc
Useful power output (approx.), see note 6 . . . . .	115	205	285	380	W

##### TWO TONE MODULATION

Peak Envelope conditions for a signal having a min. peak-to-average power ratio of 2.

Ave. plate current . . . . .	190	190	190	190	mAdc
Ave. screen current (approx.) . . . . .	2	-1	-2	-2	mAdc
Ave. grid #1 current . . . . .	0	0	0	0	mAdc
Resultant peak RF grid voltage . . . . .	50	50	50	50	v
Peak envelope power output, see note 6 . . . . .	115	205	285	380	W

#### PLATE-MODULATED RADIO-FREQUENCY AMPLIFIER CLASS C

Plate voltage . . . . .	500	1000	1500	Vdc
Screen voltage . . . . .	250	250	250	Vdc
Grid voltage . . . . .	-100	-100	-100	Vdc
Plate current . . . . .	200	200	200	mAdc
Screen current (approx.) . . . . .	31	22	20	mAdc
Grid #1 current . . . . .	15	14	14	mAdc
Peak RF grid input voltage (approx.) . . . . .	118	117	117	volts
Driving power, see note 5 . . . . .	1.8	1.7	1.7	W
Plate input power . . . . .	100	200	300	W
Useful power output, (approx.) Note 6 . . . . .	57	138	223	W

### APPLICATION NOTES

Note 1. At frequencies above approximately 200 megacycles it may be necessary to reduce heater voltage to compensate for rf transit time heating of the cathode after dynamic operation of the tube has started. This back heating is a function of frequency, grid current, grid bias, anode current, duty cycle, and circuit design and adjustment. Particular care should be used in the selection of stable circuit components and in final tuning of high-frequency circuits as off-resonance operation, even to a small degree, may result in a marked and undesirable increase in cathode temperature. There is an optimum heater voltage which will maintain the cathode at the correct operating temperature for any particular set of operating conditions. A maximum variation of  $\pm 5$  percent from optimum is permitted. For straight through, Class C CW amplifier operation, the following heater operation voltages are indicated:

Frequency (Mc)	Ef(Vac)
201 to 300	5.75
301 to 400	5.50
401 to 500	5.00



CK8167/  
4CX300A

CERAMIC TETRODE  
RF POWER AMPLIFIER  
OR OSCILLATOR

APPLICATION NOTES (Cont'd.)

- Note 2. When the tube is operated at 100 percent of maximum rated plate dissipation at an incoming air temperature of 25°C maximum, a minimum air flow of 5.0 cfm at sea level shall pass through the anode cooler. If the socket Drawing Eimac No. SK-710, or equivalent, is used, an incoming air flow of 5.0 cfm to the lower end of the socket is required. At this flow of 5.0 cfm, the static pressure drop directly across the tube and socket is approximately 0.4 inch of water. This pressure drop varies with the amount of escaping air and with the shape and construction of the air director. The air flow rating applies at bias voltages of less than 100 volts and frequencies of less than 500 Mc. Air cooling of the tube shall be increased with increased negative grid bias, increased incoming air temperatures, or increased frequency of operation, or a combination of both. In all cases of operation, a socket which provides forced-air cooling of the base shall be used, and maximum seal and anode core temperature ratings shall not be exceeded. The air flow shall be applied before or simultaneously with electrode voltages, and may be removed simultaneously with them.
- Note 3. Since screen grid current may be reversed under certain operating conditions, precautions must be taken to assure the proper maintenance of screen grid voltage. Recommended methods are the use of a stiff voltage divider or of a regulated screen voltage. Conversely the use of a screen dropping resistor for obtaining proper screen voltage is not recommended.
- Note 4. To obtain indicated zero-signal plate current, adjust grid bias.
- Note 5. Driving power values are approximately correct at low frequencies. At high frequencies, approaching the maximum capabilities of the tube, electron transit time losses and other tube and circuit losses increase rapidly. It is therefore generally necessary to use a driver stage capable of supplying from 2 to 10 times the values shown.
- Note 6. The values for "Useful Power Output, approx." are based upon an output circuit efficiency of 95%.
- Note 7. Typical values obtained in a 450-500 Mc cavity amplifier per JAN Dwg. 285 or equivalent. Power output is the minimum measured useful power output.
- Note 8. For the maximum signal to intermodulation distortion ratio (S/D), it is recommended that low impedance regulated supplies be used for grid bias and screen voltage.

CHARACTERISTIC RANGES AND CONTROLS:

Test Conditions, except where otherwise specified.

$E_f = 6.0$  Vdc;  $E_{bb} = 1000$  Vdc;  $E_{c2} = 300$  Vdc;  $E_{c1}/I_b = 150$  mAdc

Values are initial, unless otherwise noted.

PRODUCTION TESTS: (Insp. Level II, 0.65% AQL individual tests, 1% all tests combined)

	<u>MIN.</u>	<u>MAX.</u>	
Screen grid current . . . . .	-5.0	+3.0	mAdc
Grid #1 voltage (Initial and post Vibration Noise and Shock limit) . . . . .	-32.0	-46.0	Vdc
Total grid current ( $E_{bb} = 2000$ Vdc) . . . . .	---	-15.0	$\mu$ Adc
Post vibration noise, shock and 100 hour life test (3) limit . . . . .	---	-20.0	$\mu$ Adc
Primary control grid emission			
$I_{c1} = 70$ mAdc, $t = 15$ ; anode and screen grid floating.			
Initial and 500 hour life test (1) limit . . . . .	---	-25	$\mu$ Adc
Primary screen grid emission			
$E_{c1} = 0$ Vdc; $I_{c2} = 100$ mAdc; $t = 15$ ; anode floating.			
Initial and 500 hour life test (1) limit . . . . .	---	-250	$\mu$ Adc
Heater current, initial . . . . .	2.60	3.10	Aac
Life test (4) 200 hour limit . . . . .	2.20	3.20	Aac

CERAMIC TETRODE  
RF POWER AMPLIFIER  
OR OSCILLATORCHARACTERISTIC RANGES AND CONTROLS (Cont'd):

## PRODUCTION TESTS: (Cont'd.)

## Pulse emission (1)

Eb = Ec<sub>2</sub> = 250 Vdc; Ec<sub>1</sub> = -100 Vdc; egk/ik = 1.5a

Ef = 5.4 Vac; prr = 11 ± 1 cps; tp = 4,500 μsec.

Δik (from leading edge to trailing edge) shall not exceed . . . . . --- 200 ma

## Positive grid current division

Eb = Ec<sub>2</sub> = 250 Vdc; Ec<sub>1</sub> = -100 Vdc; egk/Ib = 1.0a;

prr = 11 ± 1 cps; tp = 4500 μsec

egk . . . . . +8.0 +18.0 v

ic1 . . . . . --- 250 ma

ic2 . . . . . --- 250 ma

DESIGN TESTS: (Lot Sampling, Insp. Level L6, 6.5% AQL)

## Direct interelectrode capacitance

Grid to plate (max.) . . . . . --- 0.06 pf

Input . . . . . 25.0 33.0 pf

Output . . . . . 3.5 4.5 pf

## Pulse emission (2)

Eb = Ec<sub>2</sub> = 250 Vdc; Ec<sub>1</sub> = -100 Vdc; egk/ik = 1.5a,

Ef = 6.0 Vac; prr = 11 ± 1 cps; tp = 4500 μsec. Maximum

Δik (from leading edge to trailing edge) initial, 500 hour  
life test (1) and 100 hour life test (3) limit . . . . . --- 100 ma

## Power output

Class C amplifier; F = 450 to 500 Mc/s; Ebb = 2000 Vdc;

Ec<sub>1</sub> = -90 Vdc; Ec<sub>2</sub> = 250 to 300 Vdc; Ic<sub>1</sub> = 25 mAdc max.;Ef = 5.0 Vac; Eg<sub>1</sub>/Ib = 250 mAdc. Circuit and cavity in  
accordance with drawing 285-JAN or equivalent . . . . . 225 --- W

## Heater-cathode leakage (Ehk = ± 250 Vdc)

Initial 500 hour life test (1), and 200 hour life test (4) limit . . . . . --- 150 μAdc

SPECIAL PERFORMANCE TESTS TO INSURE PRODUCT QUALITY

## SHOCK TEST

Impact acceleration = 50 G; duration = 11 ± 1 milliseconds; 18 total blows.

Sample is randomly selected from each production run and test is performed in three different positions. Shorts during test, whether permanent or temporary, are rejected as well as after the test. Tubes following tests also must meet initial limits for Grid Voltage and a maximum grid current limit of -20 μAdc.

## VIBRATION NOISE TEST

Frequency range: 5 to 500 to 5 cps; acceleration = 20 G peak; t = 30 minutes total.

This test is performed on a randomly selected sample from each production run. Tubes are swept in each of three positions through the specified range, then vibrated for sixty seconds at the frequency which gives the maximum vibration output voltage. During test, vibration output limit (Ep) is 20 Vac. Following test, tubes must be free of shorts, permanent or temporary, and meet initial limits for Grid Voltage and a maximum grid current limit of -20 μAdc.

**CK8167/  
4CX300A****CERAMIC TETRODE  
RF POWER AMPLIFIER  
OR OSCILLATOR**SPECIAL PERFORMANCE TESTS TO INSURE PRODUCT QUALITY (Cont'd.)**LIFE TESTS****LIFE TEST (1) 500 hour test**

This test is performed on a randomly selected sample, Group C, from each production run under Power Output conditions. Following this test, tubes will not show shorts or open circuits and pass initial limits for Pulse Emission (2), primary control grid emission, primary screen grid emission and heater cathode leakage.

**LIFE TEST (2) 500 hour test**

This test is operated at accelerated heater voltage ( $E_f = 6.6$ ), no voltage on other elements on a randomly selected sample, Group C, from each production run. Tested a minimum of 30 minutes after  $E_f$  is turned off, tubes shall pass a minimum resistance limit of 100 Megs for  $R_{g1g2}$  and  $R_{g1k}$ .

**LIFE TEST (3) 100 hour test**


This test is performed on a randomly selected sample, Group D, from each production lot at:  $F = 1$  kc min.;  $E_{bb} = 1000$  Vdc;  $E_{c2} = 250$  Vdc;  $E_{c1}/I_b = 50$  mA dc;  $E_{g1}/I_b = 100$  mA dc;  $R_p = 1000$  ohms;  $T_{\text{ambient}} = 200^\circ\text{C}$  min. After 100 hours, tubes must be free of all shorts and open circuits and pass the initial limit for Pulse Emission (2) and a maximum Grid Current limit of  $-20 \mu\text{A}$  dc.

**LIFE TEST (4) 200 hour test — Heater Cycling Life Test.**

With normal test conditions on all elements except  $E_{c1} = -100$  Vdc, and heater voltage cycling 2 minutes ON and 4 minutes OFF, this test is performed on a randomly selected sample from each production run. No grid-cathode shorts are allowed during or after life test. In addition, after tests, tubes must pass initial limits for heater-cathode leakage and heater current limits of 2.2 to 3.2 Aac.

CERAMIC TETRODE  
RF POWER AMPLIFIER  
OR OSCILLATOR

CK8167/  
4CX300A

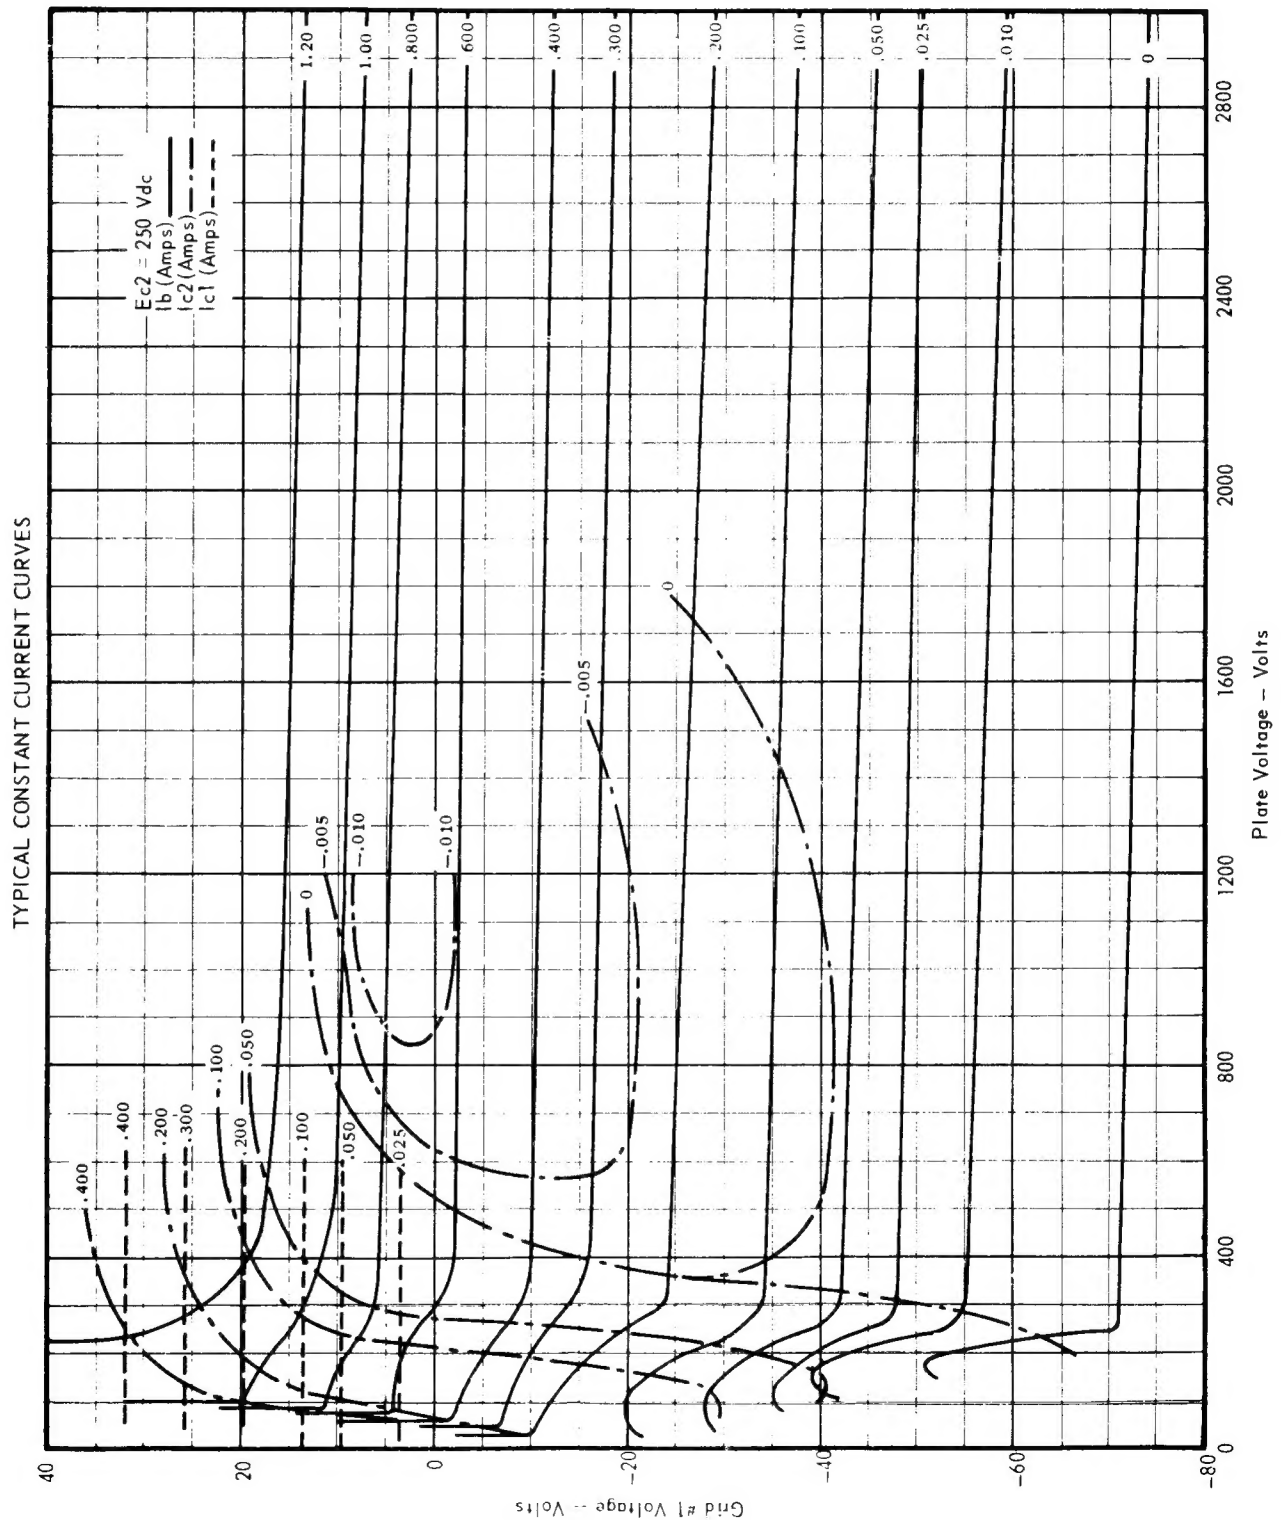

CK8167/  
4CX300A

CERAMIC TETRODE  
RF POWER AMPLIFIER  
OR OSCILLATOR

